


Codice ordinazione Ordering code

1	2	3	4
HVUR	*	*	*

			*
1	Valvola unidirezionale manicotto femmina-femmina versione a spillo Check valve female-female manifold poppet type		HVUR
2	Dimensione Size	1/4" GAS (BSPP)	140
		3/8" GAS (BSPP)	380
		1/2" GAS (BSPP)	120
		3/4" GAS (BSPP)	340
		1" GAS (BSPP)	100
3	Tenuta Sealing	Tenuta a cono / Poppet type	SP
4	Inizio apertura Cracking pressure	0,5 bar standart	-
		3 bar	3
		6 bar	6

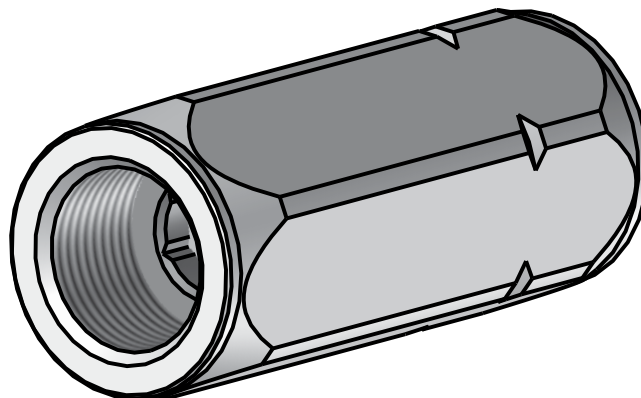




Caratteristiche Characteristics

Portata min/max	Min/max flow-rate	l/min-GPM	Diagramma
Pressione di lavoro max	Max working pressure	-	350 bar 5075 PSI
Temperatura ambiente	Room temperature	°C	-30 +50
Temperatura olio	Oil temperature	°C	-30 +80
Filtraggio consigliato	Recommended Filtration	micron	50

Schema idraulico Hydraulic circuit



Diagramma Perdite Di Carico Pressure Drop Curves

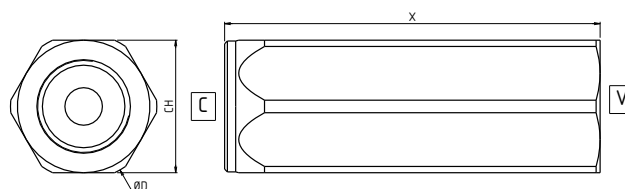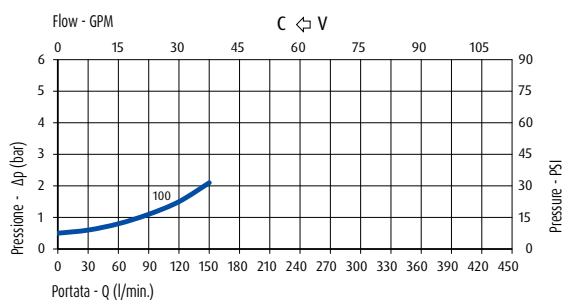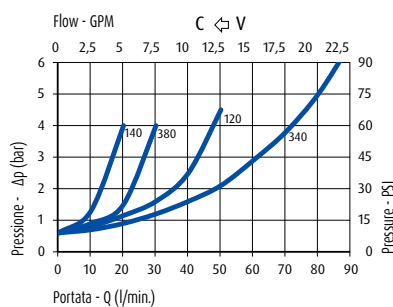

	CH	X	ØD	PORTS (C-V)
140	19	62	21	1/4" GAS
380	24	68	26.5	3/8" GAS
120	27	77	30	1/2" GAS
340	32	88	36	3/4" GAS
100	41	105	46	1" GAS