


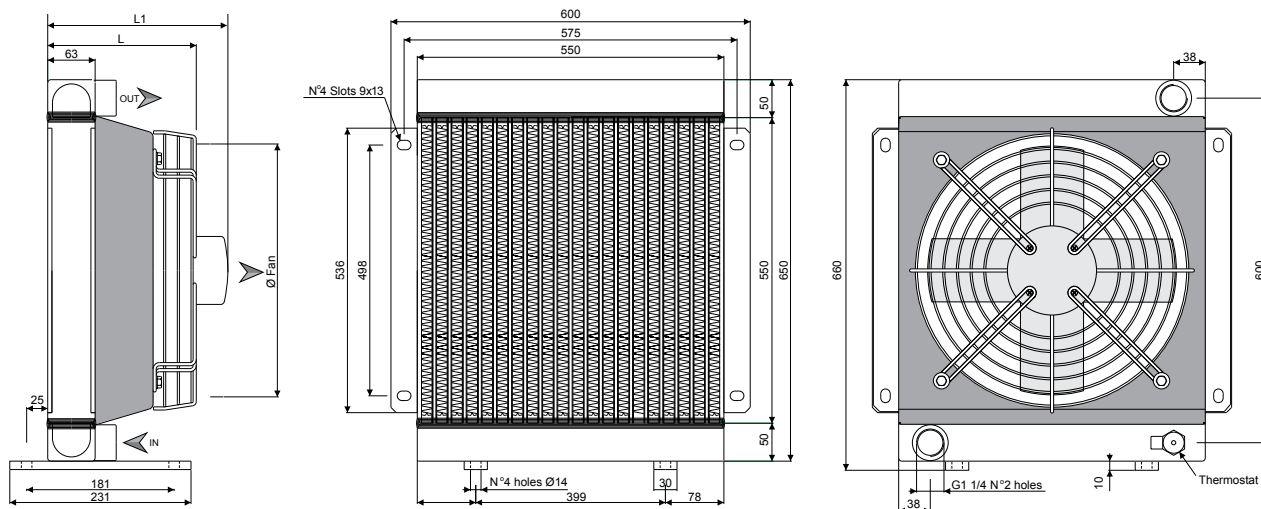

Caratteristiche tecniche del gruppo di ventilazione Technical features

Codice Prodotto Product Code	Frequenza Frequency Hz	Tensione Voltage V	Giri/min RPM	Potenza Power kW	Continua Current A	Q air (m ³ /h)	dB (A)	Ø Ventola Ø FAN mm.	L mm.	L1 mm.	Cap. (lt.)	Peso Weight (kg.)	IP
HFTS5001A-T03F	50/60	230	1380/1580	0,37/0,45	0,98/1,45	5900/6400	70/71	450	-	298	0.48	7	54
HFTS5003A-T03F	50/60	400	1380/1580	0,37/0,43	0,51/0,54	6500/7000	70/71	450	-	298	0.48	7	54
HFTS5024A-T03F	DC	24	3000	0,125 (x2)	5,2 (x2)	1470 (x2)	73	280	195	-	0.48	6.5	65
HFTS5012A-T03F	DC	12	3000	0,125 (x2)	10 (x2)	1400 (x2)	73	280	195	-	0.48	6.5	65

Fattore di correzione - F - (perdite di carico) Correction factor - F - (Pressure drop)

CST	10	15	20	32	40	50	60	80	100	200	300
F	0.5	0.65	0.77	1	1.2	1.4	1.6	1.9	2.1	3.3	4.3

Perdite di carico (ISO VG 32) Pressure drop (ISO VG 32)

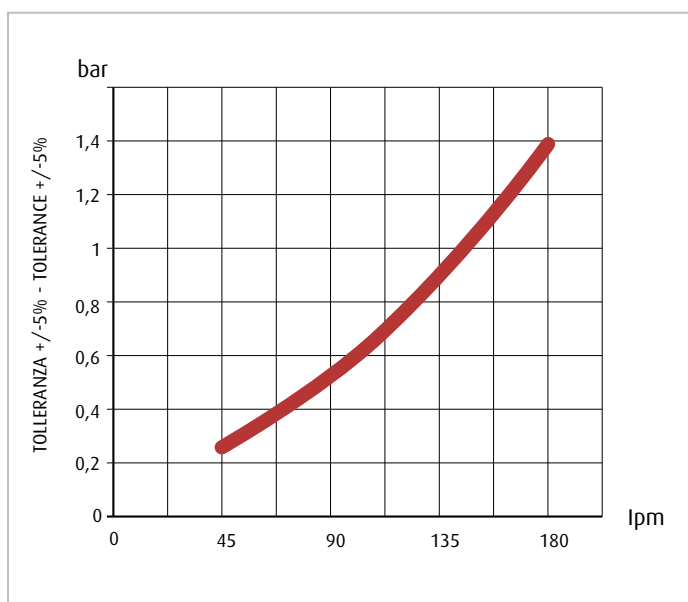


Diagramma di rendimento Performance diagram

